


Phelps Honey Wagon, Inc.

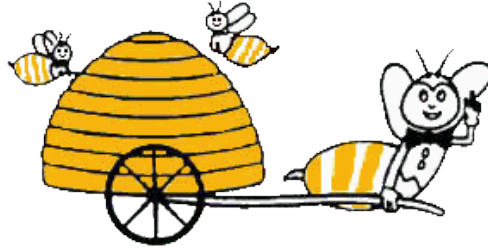

PHW 300G

- Pump:** Cast aluminum pump to resist corrosion
12 in. nylon reinforced diaphragm
60 gallons per minute
Will pump a 25 ft. head
Neoprene Flapper Valves
Self-priming
- Motor:** 3.5 H.P. Briggs & Stratton engine or 5.5 H.P. Honda engine
- Tank:** 300 Gallon Capacity Tank
Polyethylene elliptical plastic tank for long life with approx. 1/4 in. walls
Dimensions: 48 in. width | 32 in. height | 70 in. length
Translucent tank to show content level
Tank is supported by a steel pan on a 5 in. steel channel frame
Large top lid for easy interior hose down
- Discharge:** Gravity drain with 3 in. rear discharge gate valve and cap
- Adapters:** RV Hose Adapter, fits all RV's
- Hose:** 50 ft. of 2 in. Hi Vac hose, very flexible, tough, lightweight and non-kinking
- Tongue:** 2 in. ball coupler
Side Wind Jack with Wheel (800 lbs. maximum)
- Axle:** Single axle - 3500 lbs. rating
- Tires:** 175/80-13" tires
- Weight:** Approx. 840 lbs
- Warranty:** One year warranty on trailer and tank
One year warranty on pump, except for wearable parts
Engine has warranty by an authorized dealer:
- Honda - 2 years
 - Briggs & Stratton - 90 days

158 Whiskey Springs Road
Dillsburg, PA 17019
Phone: 1-800-463-3707

www.phelpshoneywagon.com